

To make it easier for you to switch from 3G to LTE, you will find a relocation service in the portal.
The device can be adapted to an LTE variant of the same type in the portal.

Example: REX100 3G >> REX100 LTE

Please have your new LTE device and a USB stick ready.



This change can only be implemented once. A return of LTE to a 3G device is no longer possible after the conversion.




The following screenshots and settings were taken in the "Advanced View".

1. Change Device type

You can find this setting under Management >> project >> router.

Click on the wrench icon and select "Change Device".

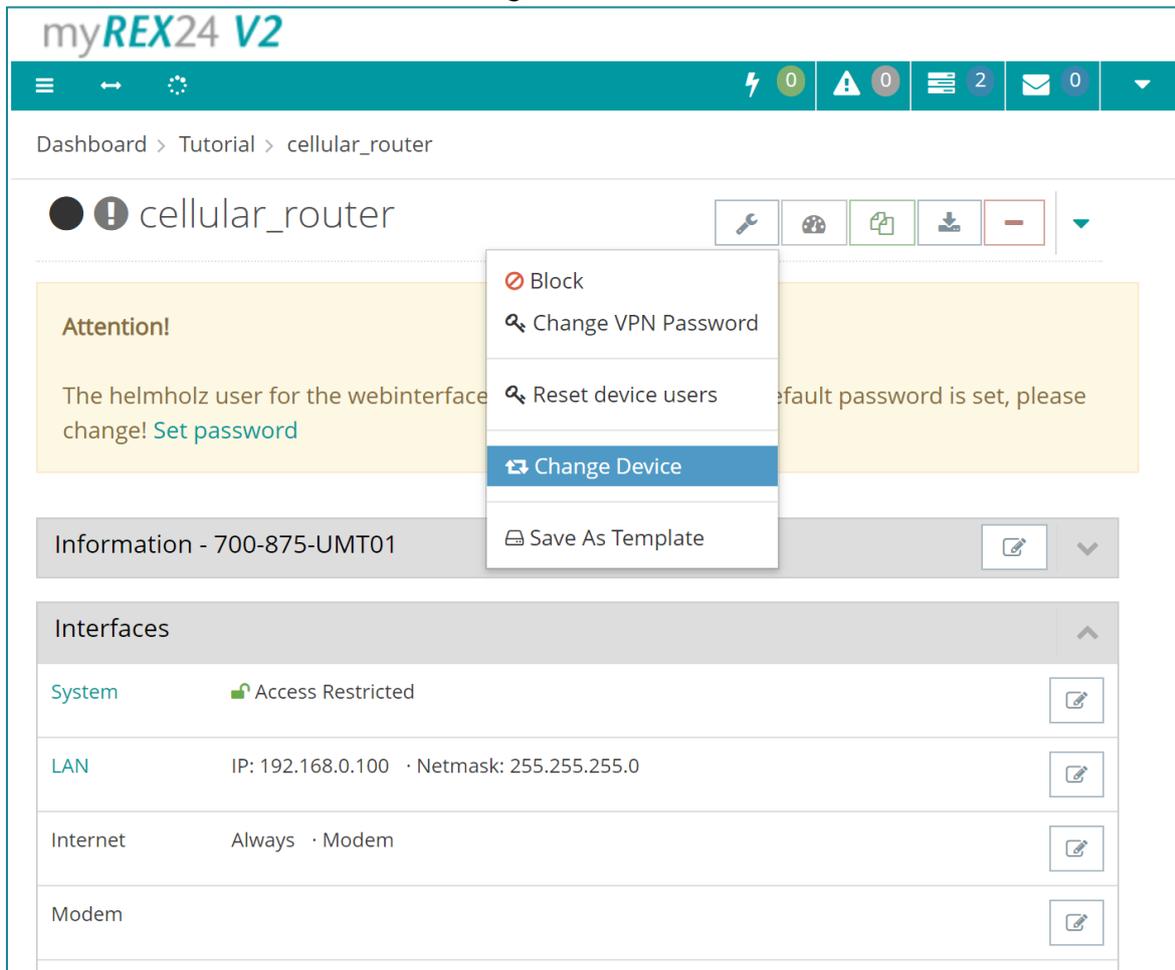


The screenshot shows the myREX24 V2 web interface. The breadcrumb trail is Dashboard > Tutorial > cellular_router. The main heading is cellular_router. A yellow attention box contains the text: "Attention! The helmholz user for the webinterface change! Set password". A context menu is open over the wrench icon, listing the following options: Block, Change VPN Password, Reset device users, Change Device (highlighted), and Save As Template. Below the menu, the "Information - 700-875-UMT01" section is visible. The "Interfaces" section is expanded, showing a table with the following data:

Interface	Configuration	Action
System	Access Restricted	[Edit]
LAN	IP: 192.168.0.100 · Netmask: 255.255.255.0	[Edit]
Internet	Always · Modem	[Edit]
Modem		[Edit]

2. Choose the correct LTE variant

Select the appropriate item number/device type of your new device. Please pay close attention to the correct article number.

The setting can only be saved if the checkbox is checked.

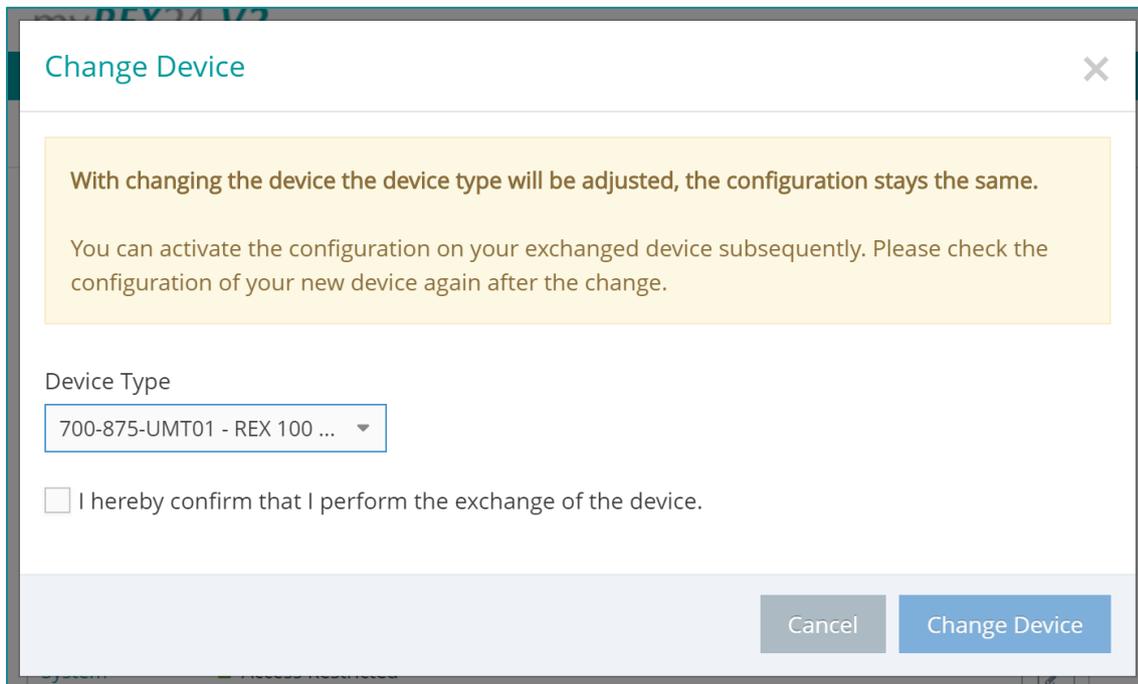

Change Device [X]


With changing the device the device type will be adjusted, the configuration stays the same.

You can activate the configuration on your exchanged device subsequently. Please check the configuration of your new device again after the change.

Device Type
700-875-UMT01 - REX 100 ... ▾

I hereby confirm that I perform the exchange of the device.

Cancel Change Device

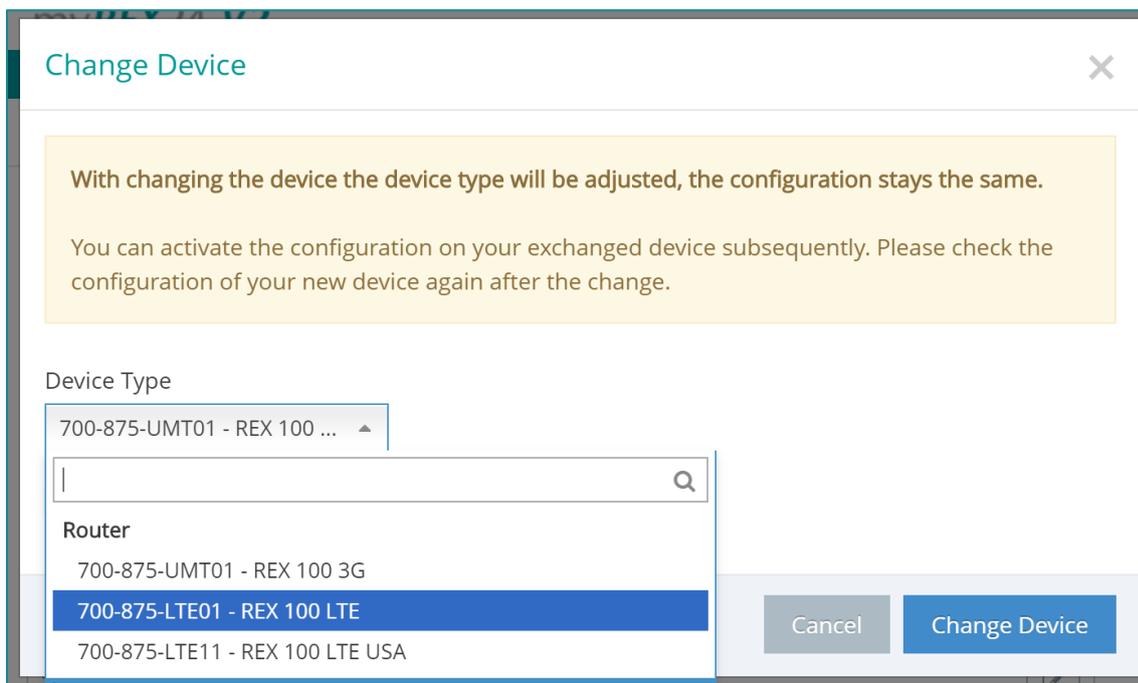

Change Device [X]

With changing the device the device type will be adjusted, the configuration stays the same.

You can activate the configuration on your exchanged device subsequently. Please check the configuration of your new device again after the change.

Device Type
700-875-UMT01 - REX 100 ... ▲

Router


- 700-875-UMT01 - REX 100 3G
- 700-875-LTE01 - REX 100 LTE**
- 700-875-LTE11 - REX 100 LTE USA

Cancel Change Device

3. Transfer the configuration to the new LTE router

The existing configuration has now been transferred to an LTE device type. Now please transfer the configuration to your new LTE device.

After transferring the configuration to the LTE device, it is available again at the myREX24 V2 portal.

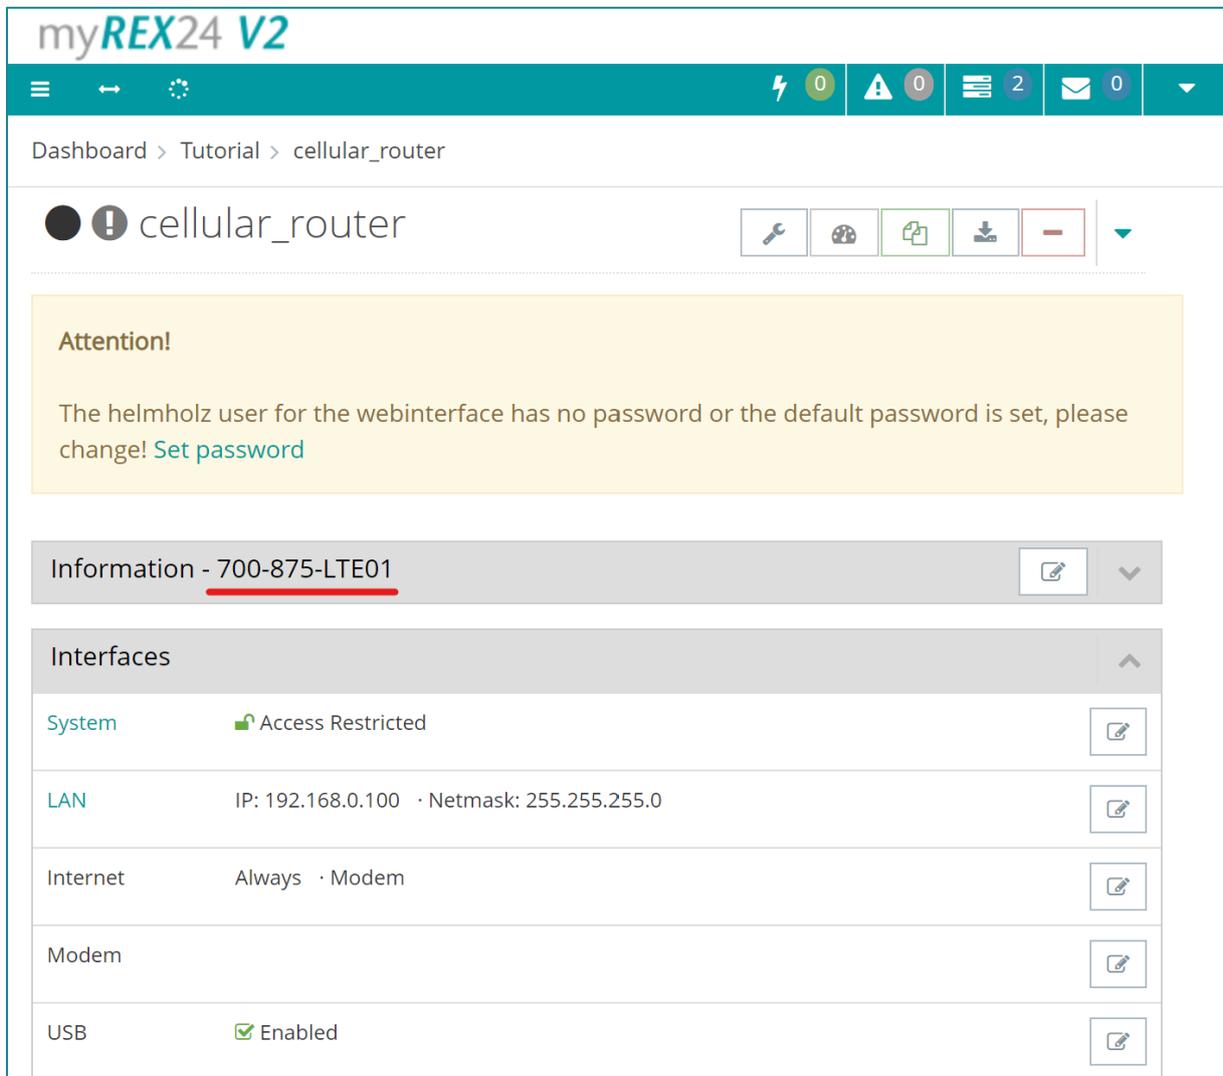

The screenshot shows the myREX24 V2 web interface. At the top, there is a navigation bar with the title "myREX24 V2" and a status bar with icons for battery, alerts, and messages. Below the navigation bar, the breadcrumb "Dashboard > Tutorial > cellular_router" is visible. The main content area shows the configuration for "cellular_router". There is a yellow "Attention!" box with the message: "The helmholz user for the webinterface has no password or the default password is set, please change! [Set password](#)". Below this, there is a section for "Information - 700-875-LTE01" and a table of "Interfaces".

Information - 700-875-LTE01		
Interfaces		
System	<input checked="" type="checkbox"/> Access Restricted	
LAN	IP: 192.168.0.100 · Netmask: 255.255.255.0	
Internet	Always · Modem	
Modem		
USB	<input checked="" type="checkbox"/> Enabled	