


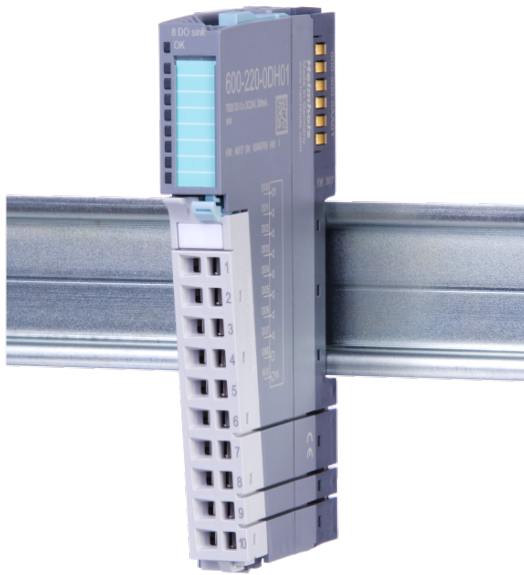

Features

- ✓ 300 mA output voltage per channel
- ✓ A blue LED indicates the module's operating status
- ✓ Green LEDs (one for each output) indicate the outputs' states
- ✓ 8 outputs, electrically isolated from the backplane bus

Digital-output-module, DC 24 V, 300mA, sink

Digital output modules for the modular fieldbus IO system TB20.

Note: Individual modules cannot be combined with IO systems from other manufacturers.

The scope of delivery already includes the appropriate front connector for the cabling and a base module. The module has 8 digital m-switching (sinking) outputs with an output power of up to 300mA.

General information

Order number	600-220-0DH01
Article name	DO 8x DC 24 V, 300 mA, sink
Scope of delivery	DO 8x DC 24 V
Dimensions (DxWxH)	110 x 14 x 73 mm
Weight	approx. 70 g
Number of outputs	8
Power dissipation	Max. 2.5 W
Output short-circuit protection	Electronic, for each individual channel
Inductive cutoff voltage limit	-48 V
Hot-swap capable	Yes

Hot-swap capable	Yes
------------------	-----

Electrical isolation

from the backplane bus	Yes
------------------------	-----

Between the channels	No
----------------------	----

Supply voltage UP, US

Rated value	-24 V DC
-------------	----------

Ripple USS	Max. 3.6 V
------------	------------

Permissible range (with ripple)	20 ... 30 V
---------------------------------	-------------

Voltage for $t < 10$ ms	50 V
-------------------------	------

Output current

Rated value	300 mA
-------------	--------

Leakage current	max. 0,5 mA
-----------------	-------------

Current draw

External	Max. 40 mA + load
----------	-------------------

Internal	Max. 35 mA
----------	------------

Ambient conditions

Ambient temperature	0 °C ... +60 °C
---------------------	-----------------

Transport and storage temperature	-20 °C ... +80 °C
-----------------------------------	-------------------

Relative air humidity	95 % r H without condensation
-----------------------	-------------------------------

Pollution degree	2
------------------	---

Protection rating	IP 20
-------------------	-------

Certifications	CE, UL
----------------	--------

UL

Surrounding Air Temperature	0 °C ... +60°C
-----------------------------	----------------

Pollution degree	2
------------------	---

CE

Noise immunity	DIN EN 61000-6-2 "EMC Immunity"
----------------	---------------------------------

Interference emission	DIN EN 61000-6-4 "EMC Emission"
-----------------------	---------------------------------

