


Features

- ✓ Cable length 3m

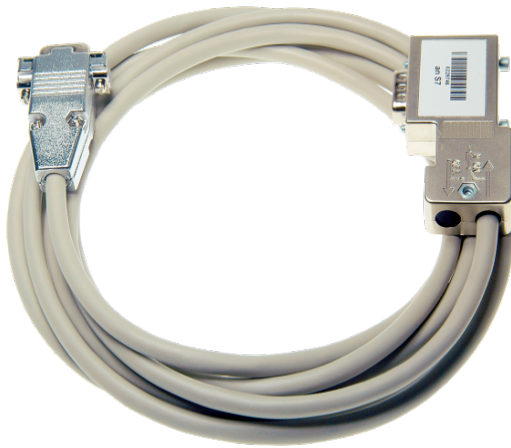

Active dropcable PROFIBUS for PG

The active dropcable PROFIBUS is used for easy connection of a PG to an existing PROFIBUS network. Due to the integrated electronics, it is not a stub.

The active dropcable PROFIBUS is used for easy connection of a PG to an existing PROFIBUS network. Due to the integrated electronics, it is not a stub.

General information

Order number	700-901-4BD00
Article name	Active dropcable PROFIBUS for PG with 90° PROFIBUS connector
Scope of delivery	Dropcable PROFIBUS, 3 m, Instruction
Weight	approx. 260 g
Connection	SUB-D connector, 9-pin
Voltage supply	5 V DC
Current draw	max. 100 mA at 5 V DC

Ambient conditions

Ambient temperature	0 °C ... +60 °C
Transport and storage temperature	-25 °C ... +75 °C
Relative air humidity	95 % r. H. without condensation
Pollution degree	2
Approvals	CE