


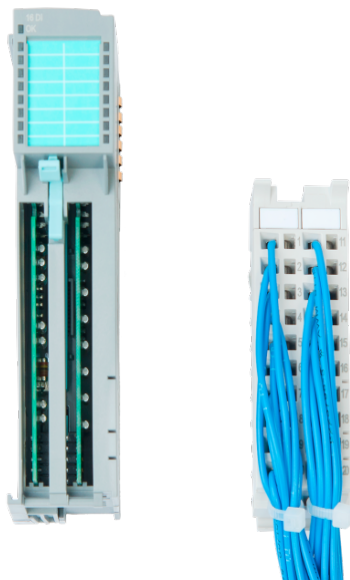

Features

- ✓ Cable length 3.2 m
- ✓ 0.5 mm², RAL5010, blue (RAL 5010), UL/cUL Style 1015, 600V
- ✓ 20-pin

TB20 ready-wired front connectors

The ready-wired front connectors for the TB20 system greatly simplify the installation and wiring of the IO system. The ready-wired front connectors are available in various cable lengths.

The 20-pin front connector with wires and spring-loaded technology enables easy connection of sensors and actuators to the input/output modules of the TB20 I/O system.

When replacing I/O modules, the wiring can thus be maintained, assembly time saved and wiring errors avoided.