


Features

- ✓ 20-pin
- ✓ screw contacts

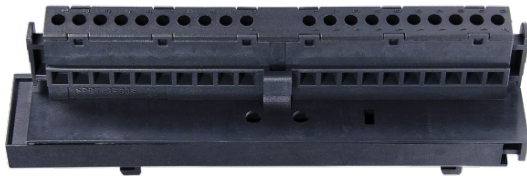

Front connector for DEA/AEA300, 20 pin, screw contacts

Front connectors enable easy connection of sensors and actuators to input/output modules. The wiring can thus be retained when modules are replaced.

The 20-pin front connector is designed with proven screw contacts.

General information

Order number	700-392-1AJ10
Article name	Front connector, screw contacts, 20-pin
Scope of delivery	Front connector
Weight	Approx. 60 g

Connector

Connector type	screw contacts
Number	Flexible and rigid cables
Connectible cables	Flexible and solid cables

Stripping length	6 mm
With/without ferrules	0.25 – 1.5 mm ²
Tightening torque	max. 0.5 Nm
Voltage	230 V AC
Current	3 A at 60 °C

Ambient conditions

Ambient temperature	0 °C ... +60 °C
Transport and storage temperature	-25 °C ... +80 °C
Relative air humidity	max. 75 % at +25 °C
Pollution degree	2
Protection rating	IP20
Approvals	CE