


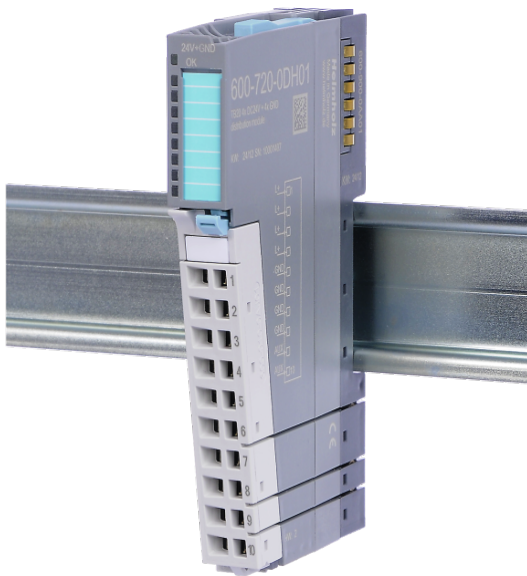

Features

- ✓ Max. 8 A supply load
- ✓ Powers outputs using the power bus
- ✓ A blue LED indicates the module's operating status

Potential distributor 4x DC 24 V + 4x GND

Potential distributors simplify the wiring work and expand the connection options.

The 4x DC 24 V + 4x GND potential distributor makes the 24 V DC supply and the GND connection from the power bus available on the front connector.

Note: Individual modules cannot be combined with the IO systems of other manufacturers.

General information

Order number	600-720-0CH01
Article name	Potential distributor 10x AUX
Scope of delivery	Potential distributor 10x AUX
Dimensions (DxWxH)	110 x 14 x 73 mm
Weight	Approx. 75 g
Power dissipation	Max. 0.1 W
Hot-swap capable	Yes

Current draw

External	Max. 0 mA
----------	-----------

Internal	Max. 22 mA
Load	
Per contact	8A
Total load	8A
Total load	8A
Ambient conditions	
Ambient temperature	0 °C ... +60 °C
Transport and storage temperature	-20 °C ... +80 °C
Relative air humidity	95 % r H without condensation
Protection rating	IP 20
Certifications	CE, UL
UL	
Surrounding Air Temperature	0 °C ... +60°C
Pollution degree	2
CE	
Noise immunity	DIN EN 61000-6-2 "EMC Immunity"
Interference emission	DIN EN 61000-6-4 "EMC Emission"
Vibration and shock resistance	DIN EN 60068-2-6:2008 „Vibration“, DIN EN 60068-2-27:2010 „Shock“